

CONCRETE COLLAR CAST
AROUND VALVE BOX
(SIMILAR IN FIELD)

24" DIA COVER

PAVEMENT

18" ±


8"

TRACE WIRE VIEW
BEHIND MH ON
EXTERIOR WALL

20" X 20" CONCRETE
PAD WITH 3" HOLE,
W/2-#4 EACH WAY
(4,000 PSI CONCRETE)

10GA TRACE WIRE,
TAPED TO EXTERIOR OF
MH, RUN TO 6" COMMON
CI SHORT VALVE BOX,
LABEL SEWER.

PRECAST RISER AND
ECCENTRIC CONE

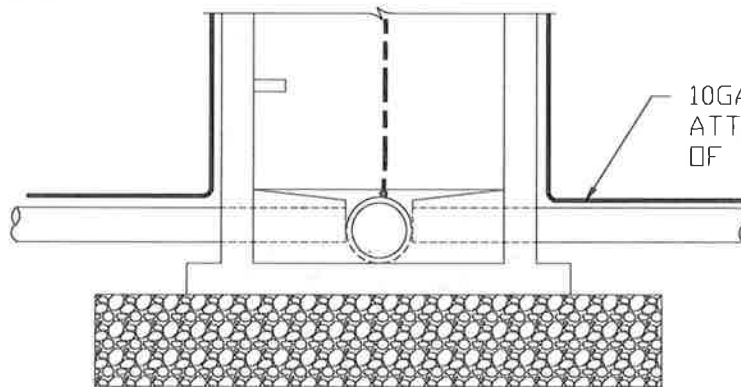

10GA TRACE WIRE
ATTACH TO TOP
OF PIPE.

NOTES:

1. SUPPLY 2 EXTRA FEET OF TRACE WIRE IN COMMON SHORT VALVE BOX.

DATE
10/25/2019



PLATTE CANYON
WATER & SANITATION DISTRICT

DRAWING
D.18S

TYPICAL
PRECAST MANHOLE
TRACE WIRE PLACEMENT
DETAIL